


SPECIFICATIONS MISURE	 DRY FREIGHT - BOX CHIUSI				 OPEN TOP APERTI SOPRA		 FLAT RACK PIATTAFORME				 REEFER FRIGO			
	MINIMUM		MAXIMUM		MINIMUM		MINIMUM		MINIMUM		MINIMUM		MINIMUM	
	20'	40'	40' ^{H.C.}	45' ^{H.C.}	20'	40'	20'	20' 8'x8'6" COLLAPSIBLE	40'	40' 8'x8'6" COLLAPSIBLE	20'	40'	40' ^{H.C.}	45' ^{H.C.}
LENGTH LUNGHEZZA	5,86 5,94	12,01 12,05	12,02 12,05	13,55 13,58	5,80 5,90	12,02 12,05	5,66 5,93	5,94 5,96	12,08 12,08	12,08 12,07	5,33 5,45	11,18 11,57	11,57 11,62	13,10 13,10
WIDTH LARGHEZZA	2,31 2,36	2,30 2,35	2,34 2,35	2,34 2,35	2,31 2,34	2,32 2,34	2,39 2,43	2,12 2,41	2,43 2,43	2,12 2,43	2,22 2,29	2,24 2,29	2,28 2,29	2,29 2,29
HEIGHT ALTEZZA	2,36 2,39	2,36 2,39	2,68 2,69	2,69 2,69	2,28 2,35	2,27 2,38	2,20 2,30	2,20 2,30	1,85 2,10	1,90 2,04	2,20 2,26	2,18 2,23	2,42 2,53	2,40 2,50
DOOR WIDTH LARGHEZZA PORTA	2,28 2,34	2,29 2,34	2,29 2,34	2,33 2,34	2,28 2,34	2,28 2,34					2,18 2,29	2,18 2,29	2,27 2,29	2,29 2,29
DOOR HEIGHT ALTEZZA PORTA	2,27 2,29	2,26 2,28	2,57 2,58	2,57 2,58	2,01 2,27	2,19 2,27					2,15 2,22	2,11 2,20	2,47 2,53	2,40 2,50
CAPACITY CAPACITÀ	32,0 33,9	65,2 67,5	75,7 76,0	85,6 86,0	31,4 32,6	64,0 66,4	32,1 33,1	28,2 32,9	61,9 61,9	52,4 57,6	26,6 28,3	54,9 59,2	64,0 67,3	72,4 75,4
MAXIMUM PAYLOAD PORTATA MASSIMA	18.270 27.980	26.880 31.900	26.680 31.850	26.580 27.620	18.170 27.980	26.680 27.900	18.020 27.920	21.300 31.030	25.780 34.520	25.780 39.200	17.520 27.330	26.580 27.900	26.050 29.100	25.680 27.300
TARE WEIGHT TARA	2.050 2.500	3.600 4.100	3.800 4.150	3.900 4.880	2.150 2.500	3.800 4.600	2.300 2.560	2.700 2.970	4.700 5.480	4.700 5.800	2.800 3.150	3.900 4.600	4.430 4.900	4.800 5.200
MAX GROSS WEIGHT PESO COMPLESSIVO	20.320 30.480	30.480 36.000	30.480 36.000	30.480 32.500	20.320 30.480	30.480 32.500	20.320 30.480	24.000 34.000	30.480 40.000	30.480 45.000	20.320 30.480	30.480 32.500	30.480 34.000	30.480 32.500

Roof Openings of Open Top Container					40'
Lenth		Height			
A	B	C	D	E	
Max. Length	Between Gusset Plates	Max. Width	Front End, between Gusset Plates	Door End between Gusset Plates	
mm	mm	mm	mm	mm	
ft	ft	ft	ft	ft	
11 885	11 22	2224	1898	1926	
38' 11-7/8"	38' 1-1/2"	7' 3-1/2"	6' 2-3/4"	6' 3-3/4"	

Door Openings of Open Top Container					40'
Width			Height		
F	G	H	I	K	
Max. Width	At Door Header	Between Top longitudinal Rails	Up to Door Header	Up to Top Longitudinal Rail	
mm	mm	mm	mm	mm	
ft	ft	ft	ft	ft	
2334	1926	2224	2284	2121	
18' 3-3/4"	18"	6' 3-3/4"	7' 5-7/8"	6' 11-1/2"	

Open Top Container 8' 6" high							40'
Inside Dimensions				Weights			Capacity
Length	Width	Height		Max. Gross kg lbs	Tare kg lbs	Max. Payload kg lbs	
		Middle mm ft	Side mm ft				
12 025 39' 5-1/2"	2335 7' 8"	2356 7' 8-3/4"	2306 7' 6-3/4"	30 480 67 200	3950 8710	26 530 58 490	66 2330

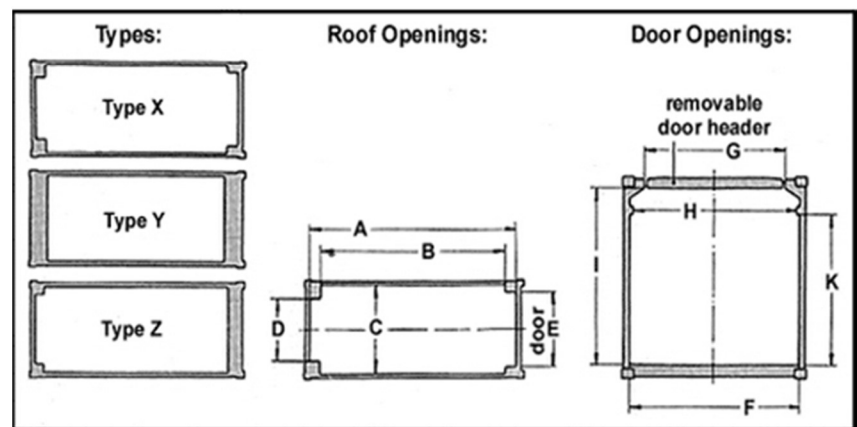

Roof Openings of Open Top Container					20'
Length		Width			
A	B	C	D	E	
Max. Length	Between Gusset Plates	Max. Width	Front End, between Gusset Plates	Door End between Gusset Plates	
mm ft	mm ft	mm ft	mm ft	mm ft	
5583 18' 3-3/4"	5488 18"	2230 7' 3-3/4"	1928 6' 3-7/8"	--	

Door Openings of Open Top Container					20'
Width			Height		
F	G	H	I	K	
Max. Width	At Door Header	Between Top longitudinal Rails	Up to Door Header	Up to Top Longitudinal Rail	
mm ft	mm ft	mm ft	mm ft	mm ft	
2335 7' 8"	1928 6' 3-7/8"	2230 7' 3-3/4"	2291 7' 6-1/4"	2194 7' 2-3/8"	

Open Top Container 8' 6" high							20'
Inside Dimensions				Weights			Capacity
Length	Width	Height		Max. Gross	Tare	Max. Payload	
		Middle	Side				kg lbs
mm ft	mm ft	mm ft	mm ft				m3 cu.ft
5895 19' 4"	2350 7' 8-1/2"	2394 7' 10-1/4"	2364 7' 9"	24 000 52 910	2100 4630	21 900 48 280	32,45 1146

